

2. AMENDMENT/MODIFICATION NO. 0001	3. EFFECTIVE DATE 01/25/02	4. REQUISITION/PURCHASE REQ. NO. W38XGR-1332-8907	5. PROJECT NO. <i>(If applicable)</i>
6. ISSUED BY CODE B1P0100		7. ADMINISTERED BY <i>(If other than Item 6)</i> CODE	
DEPARTMENT OF THE ARMY CORPS OF ENGINEERS, MEMPHIS DISTRICT 167 N. MAIN ST., B202 MEMPHIS, TN 38103-1894		See Item 6	

8. NAME AND ADDRESS OF CONTRACTOR <i>(No., street, county, State and ZIP Code)</i>	(✓)	9A. AMENDMENT OF SOLICITATION NO. DACW66-02-B-0004
	✗	9B. DATED <i>(SEE ITEM 11)</i> 01/04/02
		10A. MODIFICATION OF CONTRACTS/ORDER NO.
		10B. DATED <i>(SEE ITEM 13)</i>
CODE	FACILITY CODE	

11. THIS ITEM ONLY APPLIES TO AMENDMENTS OF SOLICITATIONS

The above numbered solicitation is amended as set forth in Item 14. The hour and date specified for receipt of Offers tended. is extended, is not extended.

Offers must acknowledge receipt of this amendment prior to the hour and date specified in the solicitation or as amended, by one of the following methods:

(a) By completing Items 8 and 15, and returning 1 copies of the amendment; (b) By acknowledging receipt of this amendment on each copy of the offer submitted; or (c) By separate letter or telegram which includes a reference to the solicitation and amendment numbers. FAILURE OF YOUR ACKNOWLEDGMENT TO BE RECEIVED AT THE PLACE DESIGNATED FOR THE RECEIPT OF OFFERS PRIOR TO THE HOUR AND DATE SPECIFIED MAY RESULT IN REJECTION OF YOUR OFFER. If by virtue of this amendment you desire to change an offer already submitted, such change may be made by telegram or letter, provided each telegram or letter makes reference to the solicitation and this amendment, and is received prior to the opening hour and date specified.

12. ACCOUNTING AND APPROPRIATION DATA *(If required)*

13. THIS ITEM APPLIES ONLY TO MODIFICATIONS OF CONTRACTS/ORDERS, IT MODIFIES THE CONTRACT/ORDER NO. AS DESCRIBED IN ITEM 14.

(✓)	A. THIS CHANGE ORDER IS ISSUED PURSUANT TO: <i>(Specify authority)</i> THE CHANGES SET FORTH IN ITEM 14 ARE MADE IN THE CONTRACT ORDER NO. IN ITEM 10A.
✗	B. THE ABOVE NUMBERED CONTRACT/ORDER IS MODIFIED TO REFLECT THE ADMINISTRATIVE CHANGES <i>(such as changes in paying office, appropriation date, etc.)</i> SET FORTH IN ITEM 14, PURSUANT TO THE AUTHORITY OF FAR 43.103(b).
	C. THIS SUPPLEMENTAL AGREEMENT IS ENTERED INTO PURSUANT TO AUTHORITY OF:
	D. OTHER <i>(Specify type of modification and authority)</i>

E. IMPORTANT: Contractor is not, is required to sign this document and return 1 copies to the issuing office.

14. DESCRIPTION OF AMENDMENT/MODIFICATION *(Organized by UCF section headings, including solicitation/contract subject matter where feasible.)*
 This solicitation is for Ditch 66, Channel Clearing, Dunklin & Pemiscot Counties, Missouri, scheduled to open 05 Feb 02, at 2:30 p.m.

- SECTION 00010, Page 1, SUPPLIES OR SERVICES AND PRICES/COSTS, is deleted in its entirety and the attached page 1 is substituted therefor.
- SECTION 00800, Page TOC 00800-1, In the title delete "CLAERING" and substitute "CLEARING".

"CONTINUED ON NEXT PAGE"

Except as provided herein, all terms and conditions of the document referenced in Item 9A or 10A, as heretofore changed, remains unchanged and in full force and effect.

15A. NAME AND TITLE OF SIGNER <i>(Type or print)</i>	16A. NAME AND TITLE OF CONTRACTING OFFICER <i>(Type or print)</i>		
15B. CONTRACTOR/OFFEROR <i>(Signature of person authorized to sign)</i>	15C. DATE SIGNED	16B. UNITED STATES OF AMERICA BY <i>(Signature of Contracting Officer)</i>	16C. DATE SIGNED

3. SECTION 00800, Page 00800-2, Paragraph 1.5.e. Delete the entire subparagraph e. and substitute the following subparagraph e:

“e. The work shall conform to the specifications and the contract drawings identified on the following index of drawings:

LOWER DITCH NO. 66
CHANNEL CLEARING
DUNKLIN AND PEMISCOT COUNTIES MISSOURI
FILE NUMBER 001A0670 – 011A0670

<u>TITLE</u>	<u>DRAWING NUMBER</u>
MAPS AND INDEX	1
PLAN AND SECTIONS	2
PLAN AND SECTIONS	3
PLAN AND SECTIONS	4
PLAN AND SECTIONS	5
PLAN AND SECTIONS	6
PLAN AND SECTIONS	7
PLAN AND SECTIONS	8
PLAN AND SECTIONS	9
PLAN AND SECTIONS	10
PLAN AND SECTIONS	11
TEMPORARY EROSION CONTROL DEVICES	STD

(DFARS 252.236-7001)”

4. SECTION 00800. Add Safety Sign at the end of Section 00800.

5. STORM WATER POLLUTION PREVENTION PLAN, Paragraph 1. Delete the entire paragraph and substitute the following paragraph 1:

“1. LOCATION AND NATURE OF ACTIVITY

This project consists of channel clearing in Lower Ditch No. 66 in Dunklin and Pemiscot Counties, Missouri.

A set of construction drawings showing the project location and the details of the channel clearing will be located on the site at all times. The clearing begins at Station 13+00 approximate intersection of Lower Ditch No. 66 and Ditch No. 1 and extends north to Station 1142+70 approximate intersection Lower Ditch No. 66,Ditch No. 251 and Ditch 251 Unimproved.”

6. STORM WATER POLLUTION PREVENTION PLAN, Paragraph 2. Substitute 155 acres for 763.36 acres.

7. STORM WATER POLLUTION PREVENTION PLAN, Paragraph 3.2.2. In the last sentence delete “Lower Buffalo Creek” and substitute “Lower Ditch No. 66”.

8. STORM WATER POLLUTION PREVENTION PLAN, Paragraph 3.2.6. Delete paragraph 3.2.6 and substitute the following:

“3.2.6 Velocity Dissipation Devices

Should drains or swales be used, they shall be constructed with velocity dissipation devices (check dams) to reduce the need for more stringent erosion control practices in the swale or drain due to the decreased velocity and energy of runoff. These devices shall be removed after the erosive areas have been stabilized.”

9. STORM WATER POLLUTION PREVENTION PLAN, Paragraph 4.1.1. In the first sentence delete “and excavation”.

10. STORM WATER POLLUTION PREVENTION PLAN, Paragraph 7.2. Delete “Lower Buffalo Creek” and substitute “Lower Ditch No. 66”.

11. SECTION 01025, Page 01025-TOC-1. Delete PART 1 and substitute the following:

“PART 1 GENERAL
1.1 LUMP SUM PAYMENT ITEMS
1.1.1 General
1.1.2 Lump Sum Items
1.2 UNIT PRICE PAYMENT ITEMS
1.2.1 General
1.2.2 Unit Price Items”

12. SECTION 01025, Page 01025-1, Paragraph 1.1.2. Delete the entire paragraph and substitute the following:

“1.1.2 Lump Sum Items

(1) "Mobilization and Demobilization"

a. Payment

Payment will be made for costs associated with operations necessary for mobilization and demobilization as specified in Section 00800 paragraph 1.29.

b. Unit of measure, lump sum: LS.

(2) "Environmental Protection"

a. Payment

Payment will be made for costs associated with operations necessary for environmental protection as specified in SECTION 01130.

b. Unit of measure, lump sum: LS”

13. SECTION 01025, Page 01025-2, Paragraph 1.2. Delete the entire paragraph 1.2 and substitute the following:

“1.2 UNIT PRICE PAYMENT ITEMS

1.2.1 General

Payment items for the work of this contract on which the contract progress payments will be based are listed in the BIDDING SCHEDULE and described below. The unit price and payment made for each item listed shall constitute full compensation for furnishing all plant, labor, materials, and equipment, and performing any associated Contractor quality control, meeting safety requirements, tests and reports, and for performing all work required for each of the unit price items.

1.2.2 Unit Price Items

(1) “Clearing”

a. Measurement

Measurement will not be required. Partial payments will be made by estimating approximate station locations through the area by use of prominent topographic features in the field. No reduction of the contract quantity will be made for areas within the areas specified for clearing which require no clearing or which are partly cleared.

b. Payment

Payment for clearing, measured as prescribed hereinabove, will be made at the contract unit price per station (100 linear feet) for “Clearing”, which price and payment shall constitute full compensation for furnishing all plant, labor, material, and equipment and performing all operations necessary for clearing of the areas specified herein or as

indicated on the drawings; for removing and disposing of all cleared materials, and all other operations incidental thereto, all as specified in SECTION 02210. No reduction of the contract quantity will be made for areas within the areas specified to be cleared which require no clearing or which are partly cleared.

c. Unit of Measure, Station (100 linear feet): ST”

14. SECTION 01451, Page 01451-2, Paragraph 3.2.2.d and e. Delete subparagraphs d. and e. and substitute the following:

“d. Procedures for scheduling, reviewing, certifying, and managing submittals, including those of subcontractors, off-site fabricators, suppliers, and purchasing agents. These procedures shall be in accordance with SPECIAL CONTRACT REQUIREMENT entitled "Submittals".

e. Control, verification, and acceptance testing procedures for each specific test to include the test name, specification paragraph requiring test, feature of work to be tested, test frequency, testing laboratory, and person responsible for each test.“

15. SECTION 02210, Page 02210-3, Paragraph 3.1.1. Delete paragraph in its entirety and substitute the following:

“3.1.1 General

The channel clearing shall begin at Station 13+00 and proceed continuously upstream to Station 1142+70 as indicated on the drawings. Clearing shall consist of top bank to 90 feet into the channel the removal as close as practicable above the ground surface, of all trees, down timber, snags, stumps, rootwads, drift, brush, vegetation and other debris. Areas to be cleared shall include the areas for operation of the Contractor’s equipment. Optimum effort shall be exercised by the Contractor to preserve as many trees as practicable outside the required clearing areas.

Within areas where clearing is required, all growth, stumps, partially buried logs, snags, and other projections shall be removed by uprooting or shall be cut off flush with the existing surfaces, or as indicated on the drawings unless otherwise directed by the Contracting Officer.”

16. SECTION 02210, Page 02210-3, Paragraph 3.1.2. In the first sentence delete “where excavation is required”.

17. SECTION 02210, Page 02210-3, Paragraph 3.2.1. In the first sentence after the word “site”, add “unless a hydraulic axe is used”.

18. SECTION 02210, Page 02210-4, Paragraph 3.2.2. Delete paragraph 3.2.2 in its entirety and substitute the following:

“3.2.2 Burning

The Contractor shall comply with the applicable pollution restrictions of the Missouri Air Conservation Commission, P.O. Box 1062, Jefferson City, Missouri. Subject to such restrictions and obtaining any permit which may be required by said department, the Contractor may burn material within the contract area, and at any time within the contract period, provided such burning does not cause the above standards to be exceeded. Burning operations shall be conducted so as to prevent damage to standing timber or other flammable growth. The Contractor shall be responsible for any damage to life and/or property resulting from fires that are started by his employees or as a result of his operations. The Contractor shall furnish at the site of burning operations adequate fire fighting equipment to properly equip his personnel for fighting fires. Fires shall be guarded at all times and shall be under constant surveillance until they have been extinguished.”

19. SECTION 02210, Page 02210-4, Paragraph 3.2.3. Delete paragraph in its entirety and substitute the following:

“3.2.3 Burying

If the Contractor elects to bury the debris, it shall be covered with a minimum of 2 feet of the excavated material embankment. Debris placed for burying shall be placed in such manner that it will not disperse from the right-of-way prior to being covered with earth materials. No debris shall be buried within 30 feet of the top bank of the channel.”

20. SECTION 02935. Remove Section 02935. Section 02935 is not used.

DRAWINGS

21. Drawing 2 through 11, Note 3. The first “of” should be changed to “or”.
22. Drawing 2 through 11, Note 5. Delete “50” and substitute “100”.
23. Drawing 2 through 11, Note 7. Delete “with excavated material”.
24. Drawing 2 through 11, Note 8. Delete “Contractoor” and substitute “Contractor”.
25. Drawing 3, Cross Section STA. 209+33. Delete “CLEANOUT AND CLEARING LIMITS 100’ FROM TOP BANK” and substitute “CLEARING LIMITS 90’ FROM TOP BANK”.
26. Drawing 3, Cross Section STA. 209+33. Delete distance “9600” and substitute “9960” and delete distance “9800” and substitute “9980”.
27. Drawing 10, Plan View. In the note “R/W LIMITS 25’ EAST OF EAST TOE OF EXCAVATD MATERIAL EMBANKMENT (TYP) delete misspelled word “EXCAVATD” and substitute “EXCAVATED”.
28. Drawings 10 and 11, Plan View. Delete misspelled word “PEMISCOTT” and substitute “PEMISCOT”.

*****NOTE: NO NEW DRAWINGS WILL BE ISSUED. MAKE PEN AND INK CHANGES AS REQUIRED.*****

**LOWER DITCH NO. 66
CHANNEL CLEARING
DUNKLIN AND PEMISCOT COUNTIES, MISSOURI
ST. FRANCIS BASIN PROJECT – MAINTENANCE**

**SECTION B
SUPPLIES OR SERVICES AND PRICES/COSTS**

<u>ITEM</u>	<u>DESCRIPTION</u>	<u>QUANTITY</u>	<u>U/M</u>	<u>U/P</u>	<u>AMOUNT</u>
0001	Mobilization and Demobilization	1	LS	XXX.XX	\$____.____
0002	Clearing	1,124	ST	____.____	\$____.____
0003	Environmental Protection	1	LS	XXX.XX	\$____.____
TOTAL ITEMS 0001 THRU 0003					\$____.____

ST = Station = Hundred Linear Feet

NOTE: Bidders shall furnish unit prices for all items listed on the schedule of bid items which require unit prices. If the bidder fails to insert a unit price in the appropriate blank for required items, but does furnish an extended total or an estimated amount for such item, the Government will deem his unit price to be the quotient obtained by dividing the extended estimated amount for that line item by the quantity. IF THE BIDDER OMITTS BOTH THE UNIT PRICE AND THE EXTENDED AMOUNT FOR ANY ITEM, HIS BID WILL BE DECLARED NONRESPONSIVE.

Award will be made as a whole to one bidder.

All quantities are estimated except where unit is given as "LS".

If a bid or modification to a bid based on unit

prices is submitted and provides for a lump sum adjustment to the total estimated cost, the application of the lump sum adjustment to each unit price, including lump sum units, in bid schedule must be stated, or if it is not stated, the bidder agrees that the lump sum adjustment shall be applied on a pro rata basis to every price in the bid schedule.


Bidders are cautioned to read Contract Clause entitled "Required Central Contractor Registration" (252.204-7004) located in Section 00700.

Technical POC: Jerry Welch 901/544-3236
jerry.r.welch@mvm01.usace.army.mil


Administrative POC: Estella Blackman 901/544-0768
estella.c.blackman@mvm02.usace.army.mil



ELEVATION

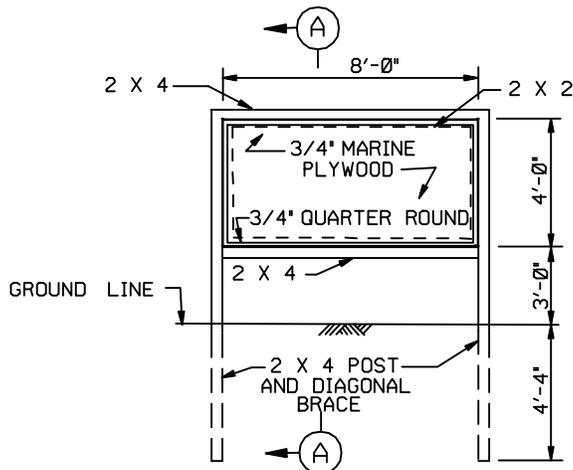

ELEVATION

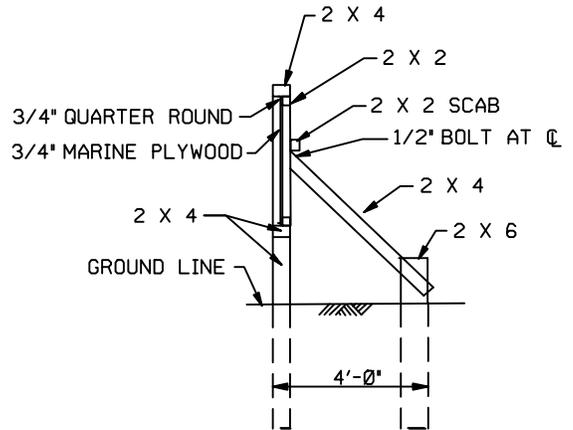

SECTION A-A

NOTES:

1. CONTRACTOR SHALL CONSTRUCT AND MAINTAIN A DURABLE SIGN AS SHOWN.
2. WOOD IN CONTACT WITH GROUND SHALL BE TREATED LUMBER.
3. ALL EXPOSED SURFACES SHALL BE WHITE HOUSE PAINT.
4. LETTERING SHALL BE BLACK.
5. ENGINEER CASTLE DECAL FURNISHED BY GOVERNMENT.
6. 22 GA. SHEET METAL MAY BE USED IN LIEU OF PLYWOOD.



**US Army Corps
of Engineers**

Memphis District

ENGINEER CASTLE DETAIL

SCALE: NONE

MARCH 1995

U.S. ARMY ENGINEER DISTRICT, MEMPHIS
CORPS OF ENGINEERS
MEMPHIS, TENNESSEE

SAFETY SIGN